



*Necessary preliminary tasks:*


- Remove trim on wheel arch from bumper trim

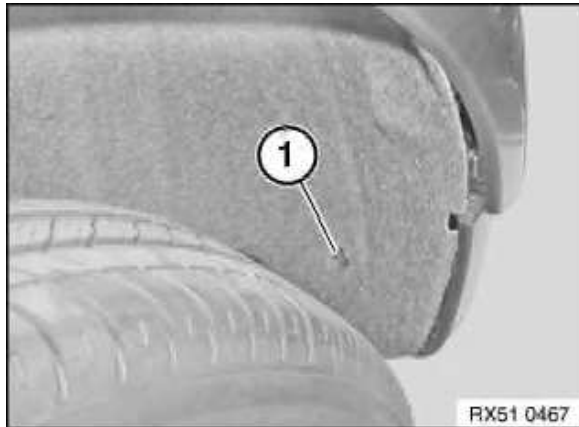

Release clip (1) on left and right.

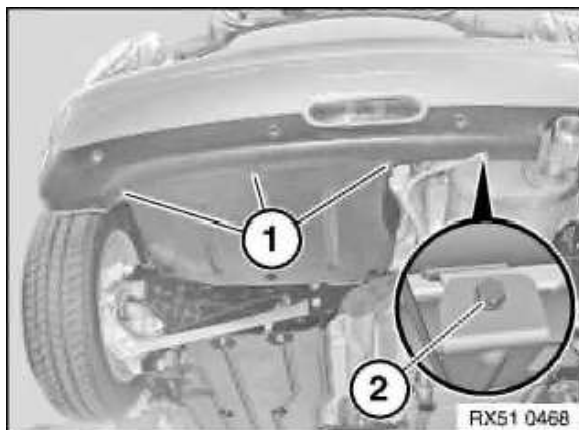

Release screws (1 and 2).

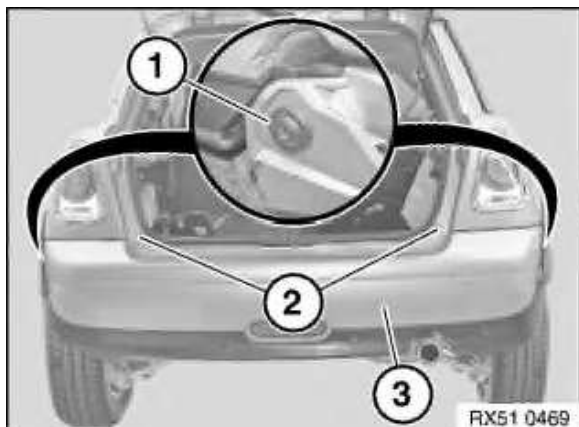

Undo screws (1 and 2)

Pull off bumper trim (3) slightly towards rear with aid of a 2nd person.

Disconnect plug connections for rear fog light/ultrasonic transducer.

Remove bumper trim (3).