


Release clip (1).

Fold wheel arch trim (2) inwards slightly and release clip (3).

*Installation:*

If necessary, replace faulty clips (1 and 3).

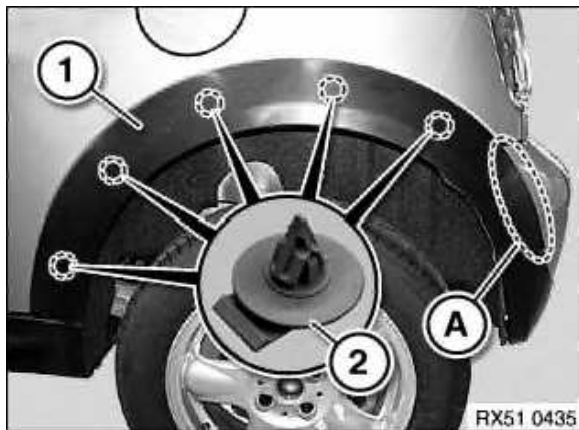


Feed trim (1) in area (A) towards rear out of bumper.

Release trim (1) from clips (2); if necessary, disconnect associated plug connection and remove.

*Installation:*

If necessary, replace faulty clips (2).



**If replacing with USA national version:**

Remove side marker lamp.