


Necessary preliminary tasks:

- Remove stabilizer



Important!

Circo Light must not be used between stabilizer and rubber mount!

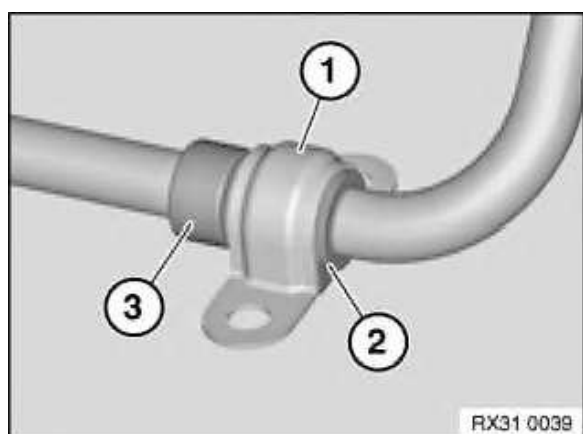

Remove retaining brackets (1).


Remove rubber mount (2) from stabilizer (2).

Installation:

Keep stabilizer clean and free of oil and grease.

Make sure rubber mount (2) is correctly engaged on locating ring (3).

To install retaining bracket (1), coat rubber mount with Circo Light (sourcing reference: BMW Parts Service).



After installation:

- Version with Dynamic Stability Control (DSC): Carry out steering angle sensor adjustment

Note:

Only cars with DSC are fitted with a steering angle sensor (integrated in the steering column switch cluster).